

MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24 V DC OUT: 24 V / 6 A

Art.No.: 9000-41078-0600001

Weight: 0.150 kg

Country of origin: CZ

Model designation: MICO FUSE 24 LED



MICO FUSE 24 LED

8 channels

Total current: max. 40 A

[Link to Product](#)

Illustration

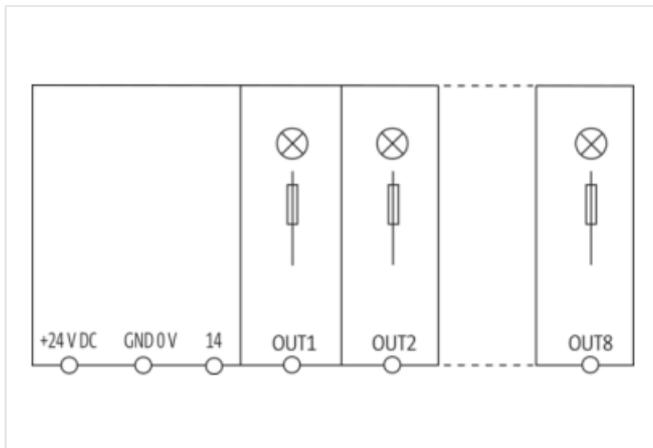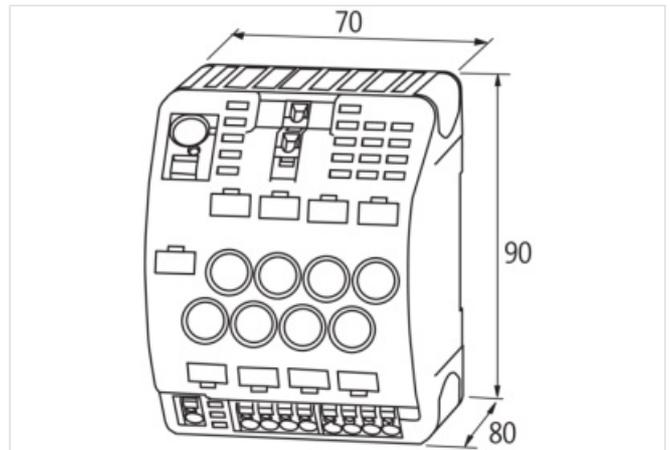

Product may differ from Image



Commercial data

Material short text	MICO FUSE 24 LED
URL Webshop	https://shop.murrelektronik.com/9000-41078-0600001
GTIN	4048879335263
ECLASS-6.0	27371802

ECLASS-6.1	27142107
ECLASS-7.0	27371802
ECLASS-7.1	27371802
ECLASS-8.0	27371802
ECLASS-8.1	27371802
ECLASS-9.0	27371802
ECLASS-9.1	27371802
ECLASS-10.0.1	27371802
ECLASS-10.1	27371802
ECLASS-11.0	27371802
ECLASS-11.1	27371802
ECLASS-12.0	27371802
ECLASS-13.0	27371802
ECLASS-14.0	27371802
ETIM-5.0	EC001440
ETIM-6.0	EC001440
ETIM-7.0	EC001440
ETIM-8.0	EC001440
customs tariff number	85363030
EAN	4048879335263
Packaging unit	1
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Operating current max.	6 A
Total current max.	40 A
Electrical data Output	
Switching current max.	20 mA
Installation	
Connection cross-section inputs max.	16 mm ²
Connection cross-section outputs min.	0,5 mm ²
Connection cross-section outputs max.	4 mm ²
Connection cross-section control inputs / control outputs max.	2,5 mm ²
Mechanical data Mounting data	
Height	90 mm
Width	70 mm
Depth	80 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Derating	40 °C
Connection type 5	
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	24 V DC

Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	0 V
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	n.c.
PIN 2	14
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 1
PIN 2	Out 2
PIN 3	Out 3
PIN 4	Out 4
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 5
PIN 2	Out 6
PIN 3	Out 7
PIN 4	Out 8