


Sep. 1. 2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

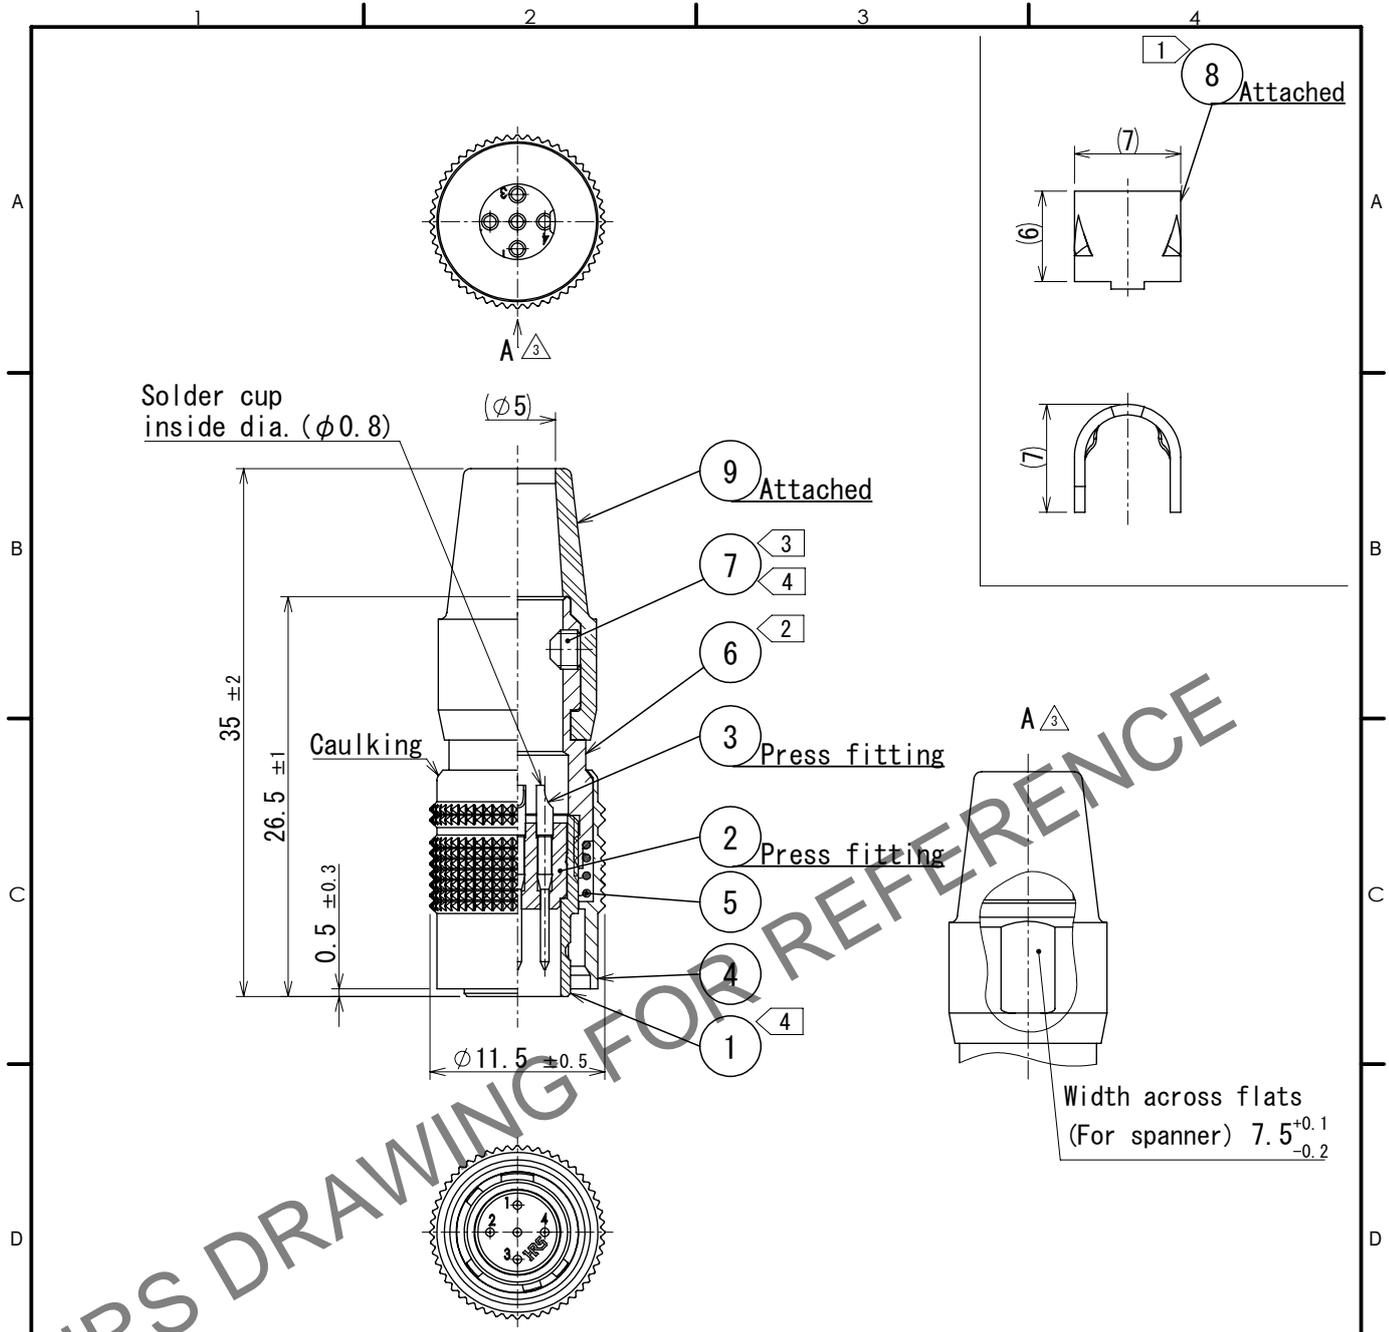

- Notes
- ① Hand crimping tool. Ref. No. ⑧: HR10A-TC-02 (CL150-0041-2)  
The hole diameter for crimping:  $\phi 5.3$
  - ② The recommended clamp torque, Ref. No. ⑥ : 1.5 to 2 N · m.
  - ③ Across flats hexagon head of Ref. No. ⑦ : 1.27  
The recommended clamp torque, Ref. No. ⑦ : 0.3 to 0.4 N · m.
  - ④ Loctite 263, Henkel Japan or equivalent applies to prevent Ref. No. ① and ⑦ from loosening.
  - ⑤ One example of the rotation of Ref. No. ⑥ to Ref. No. ① is shown.
  - ⑥ The assembly this product applies to the manual ETAD-C0354-00. △ CAD change

5	Steel	Nickel plating					
4	Brass	Matte finish nickel plated	9	Chloroprene rubber	(Black)		
3	Brass	Silver plating 2 $\mu$ m min.	8	Brass			
2	Polyamide	(Black) UL94V-0	7	Steel	Nickel plating Hexagon socket set Screw M2.6 $\times$ 0.45 $\times$ 2		
1	Zinc alloy	Matte finish nickel plated	6	Brass	Nickel plating		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

	HIROSE ELECTRIC CO., LTD.	APPROVED : MO. SATOH 2005. 10. 20	DRAWING NO. EDC-025301-73-73	
		CHECKED : EJ. KUNII 2005. 10. 20		PART NO. HR10A-7P-5P (73)
DESIGNED : DS. MATSUNE 2005. 10. 19	CODE NO. CL0110-0318-5-73			
DRAWN : DS. MATSUNE 2005. 10. 19		DIS-C-00019588	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI